

***IN THE UNITED STATES PATENT AND TRADEMARK OFFICE***

Applicant: Carles GLOTATS, et al.  
Title: PRINthead SERVICE STATION  
Appl. No.: Unassigned  
Filing Date: October 20, 2003  
Examiner: Unassigned  
Art Unit: Unassigned

**CLAIM FOR CONVENTION PRIORITY**

Commissioner for Patents  
PO Box 1450  
Alexandria, Virginia 22313-1450

Sir:

The benefit of the filing date of the following prior foreign application filed in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed.

In support of this claim, filed herewith is a certified copy of said original foreign application:


Great Britain Patent Application No. 0224478.8  
filed 10/22/2002.

Respectfully submitted,

Date: October 20, 2003

HEWLETT-PACKARD COMPANY  
Intellectual Property Administration  
P.O. Box 272400  
Fort Collins, Colorado 80527-2400

By



William T. Ellis  
Attorney for Applicant  
Registration No. 26,874





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 16 December 2002



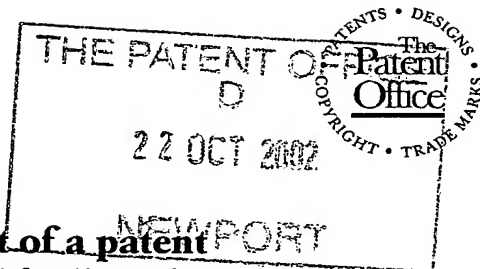

1/77  
22OCT02 E757487-1 D01463  
P01/7700 0.00-0224478.8  
The Patent Office

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference 60011826-1 GB

2. Patent application number  
(The Patent Office will fill in this part)

0224478.8

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Hewlett-Packard Company  
3000 Hanover Street  
Palo Alto  
CA 94304, USA

Patents ADP number (*if you know it*)

Delaware, USA

If the applicant is a corporate body, give the country/state of its incorporation

496588001

4. Title of the invention Printhead Service Station

5. Name of your agent (*if you have one*)

Denise M Kilgannon  
Hewlett-Packard Ltd, IP Section  
Filton Road, Stoke Gifford  
BRISTOL BS34 8QZ

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

7563083001

Patents ADP number (*if you know it*)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	10
Claim(s)	2
Abstract	1
Drawing(s)	3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

Fee Sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Denise Mary Kilgannon 21 October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

K Nommeots-Nomm Tel: 0117-312-9947

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

60011826

**Printhead Service Station**

The present invention relates to the servicing of printheads in hardcopy apparatus, in which  
5 the printheads or pens are subjected to one or more servicing operations in a service  
station. The servicing operations may include wiping, spitting, the application of a  
cleaning and/or lubricating liquid and capping the pens.

As the number of types of required servicing operations increases, and with the servicing  
10 modules for each operation arranged successively along the printhead scanning direction,  
this dimension of the service station, and hence of the hardcopy apparatus, also grows.

To reduce this problem, EP-A-0,673,772 proposes arranging the individual servicing  
modules transversely of the printhead scanning direction, i.e. in the direction of the paper  
15 axis, and providing a drive arrangement for bringing the desired servicing module into  
alignment with the printheads. U.S. patent 5,587,729 and EP-A-0,728,585 also disclose  
servicing modules moveable transversely of the printhead scanning direction. However, in  
these devices too, an increasing number of types of servicing operations can also lead to  
space problems. In addition, even modules for relatively rarely used servicing operations  
20 are moved each time the servicing station motor operates, thus imposing higher loads on  
the motor, reducing its speed and shortening its lifetime.

Certain aspects of the present invention seek to overcome or reduce one or more of the  
above disadvantages.

25 According to a first aspect of the present invention, there is provided a hardcopy device  
comprising one or more printheads, which is/are arranged to move in a scanning direction  
along a scanning axis, a printhead service station arranged at an end of said printhead  
scanning axis and comprising a movable service station carriage having a plurality of  
30 servicing modules arranged to undertake servicing operations on the or each printhead, and  
means for moving the service station carriage transversely of said scanning axis, wherein at

least one of the servicing modules is detachably connected to the other servicing module(s).

According to a second aspect of the present invention, there is provided a service station  
5 for a hardcopy device comprising a plurality of servicing modules, at least one of the modules being detachably connected to the other servicing modules.

According to a third aspect of the present invention, there is provided a method of servicing printheads of hardcopy devices comprising moving the printheads in the  
10 printhead scanning direction into a servicing position, and, for at least a first servicing operation, moving a service station transversely of the scanning direction to bring a first servicing module into alignment with the printheads to undertake the first servicing operation, and, for at least a second servicing operation, moving the service station to a position in which it is attached to an optional servicing module and then to a position in  
15 which at least the optional servicing module is in alignment with the printheads to undertake the second servicing operation.

As used herein the expression hardcopy device covers all types of printers in addition to facsimile machines, scanners and photocopiers.

20 In hardcopy devices in which the printheads are mounted on a movable carriage, the scanning axis is defined as the direction along which the carriage moves.

A service station is a component part of a hardcopy device which is typically located at one  
25 end of the scanning axis and undertakes one or more operations on the printheads.

Usually a service station undertakes a plurality of different operations on the printheads. Each operation is undertaken by a respective part of the service station known as a servicing module. Thus a service station comprises a plurality of servicing modules.

30 Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, of which:



Figure 1 is a schematic side view of a printer with a printhead carriage moving in a scanning direction;

5 Figure 2 is a sectional view on the line A-A of Figure 1;

Figure 3 is a schematic top plan view of a printhead service station of a prior art printer;

10 Figure 4 is a schematic top plan view of a printhead service station in accordance with a first embodiment of the present invention;

Figure 5 is a perspective view of a releasable connection mechanism of the embodiment of Figure 4;

15 Figure 6 is a schematic top plan view of a printhead service station in accordance with a second embodiment of the present invention;

20 Figure 7a is a schematic end view of a printhead service station in accordance with a third embodiment of the present invention with a service station carriage in a first rotary disposition;

Figure 7b is a view of the arrangement of Figure 7a with the service station carriage in a second rotary disposition;

25 Figure 7c is a view in the direction of arrow B in Figure 7a; and

Figure 8 is a schematic top plan view of a printhead service station in accordance with a fourth embodiment of the present invention.

30 Referring to the drawings, Figures 1 and 2 show a schematic view of a printer 100 comprising a fixed platen 123. A print media 122 is arranged to be moved by a motor (not shown) over platen 123 in a print media advance direction indicated by arrow 133. The

printer further comprises end plates 126,127 supporting a beam 128, along which a motor (not shown) causes a carriage 140 to move in reciprocating manner in a scanning or printing direction indicated by arrow 132. Printheads 141 to 144 are mounted on the carriage the printheads being arranged to print cyan, magenta, yellow and black ink respectively.

After each advance of the print media 122 in direction 133, the carriage undergoes one or more passes across the print media in direction 132 during which the printheads print ink on the print media.

At intervals of time, the carriage 140 is moved so as to locate printheads 141 to 144 over a service station 150 so that servicing operations can be performed on one or more of the printheads. The servicing operations will be described in greater detail below.

Figure 3 shows, in accordance with the prior art, a printhead service station carriage 10 for a colour hardcopy device, in particular an ink-jet printer. The carriage comprises a servicing module 11 at the front of the carriage for capping the printhead pens, a servicing module 12 serving as a spittoon for the pens, a servicing module 14 for wiping a black pen and a servicing module 15 at the rear of the carriage for wiping the colour pens. The carriage is movable by a motor 20 in a reciprocating manner in the paper axis direction 21, which is perpendicular to the scan direction 22. In operation of a colour hardcopy device, it is required to wipe the black pen much more frequently than the colour pens. To wipe the black pen alone, module 14 is aligned with the scanning axis and a wiping operation is undertaken. To wipe the colour pens, module 15 is aligned with the scanning axis and a wiping operation is undertaken. It will be seen that regions 16 and 18 of the carriage constitute unused spaces.

Referring now to Figure 4, a carriage 30 of a printhead service station 150 in accordance with a first embodiment of the present invention comprises a servicing module 31 at the front of the carriage for capping the pens, a servicing module 32 serving as a spittoon for the pens, and a servicing module 34 at the rear of the carriage for wiping the black pen. The carriage is driven by a motor 20 in a reciprocating manner in the direction 21. A

servicing module 35 for wiping the colour pens is detachably connected to the carriage 30 by means of a connecting arrangement 40, shown in detail in Figure 3. Module 35 is mounted on its own carriage, which travels on the same guidance system as main carriage 30.

5

In operation of the hardcopy device, when it is desired to wipe the black pen alone, module 35 is detached, motor 20 is driven to move module 34 into alignment with the scanning axis, and a wiping operation is undertaken. During this operation, module 35 is left stationary in its base position at the rear of the service station. When it is desired to wipe the colour pens as well, carriage 30 is moved adjacent module 35, module 35 is attached to the carriage, motor 20 is driven to move both modules into alignment with the scanning axis, and a wiping operation is undertaken. The carriage is then returned to its rear position and the module 35 is again detached to await the next colour pen wiping operation.

15

Figure 5 shows an enlarged view of the connecting arrangement 40, which comprises a first hook element 41, rotatably mounted at pivots 51, 52 on the top of servicing module 35, and a second hook element 42 fixed by a web portion 53 and brackets 54a, 54b to the top of carriage 30. Element 41 moves under the influence of a compression spring 48 which is urged against a spigot 48a of element 41.

20

As the motor 20 reciprocates carriage 30 in the direction of the paper axis 21, hook element 42 moves towards and away from hook element 41. When it is desired to attach module 35 to the carriage 30, the carriage is moved to the rear of the service station and inclined surface 43 of hook portion 44 of element 42 slides along inclined surface 46 of hook portion 47 of element 41. During this movement, element 41 is rotated upwardly and, when portion 44 has passed portion 47, downwardly so that portions 44 and 47 are then mutually engaged to allow module 35 to be moved to the scanning axis.

25

After an all-pens wiping operation has occurred, carriage 30 is again moved to the rear of the service station to return module 35 to its base position. Upon moving hook element 42 slightly further towards hook element 41 the latter falls into a gap 49 between hook portion

30

44 and web portion 53. The hook element 41 is thus rotated downwardly and allows hook element 41 to retract freely towards the front of the carriage. Until hook element 42 is again returned to connect to hook element 41, all the servicing operations take place without module 35 moving with the carriage 30.

5

The above-described arrangement has several advantages. Compared to the prior art device of Figure 3 there is a saving of space in the print station carriage corresponding to the area of a servicing module, which in turn corresponds generally to the printhead area of the hardcopy apparatus. By mounting the elements 41, 42 at the top, only a small amount  
10 of extra space is necessary for connection arrangement 40 in direction 21, so that module 35 can be substantially aligned in use with module 34. Since the path in the service station for movement in the direction 21 of the carriage is twice the dimension of the carriage in this direction, there is a saving of twice the area of the servicing module in the area of "footprint" of the service station, and hence of the entire hardcopy apparatus.

15

A further advantage compared with the arrangement of Figure 3 is that all the pens can be wiped in a single operation, rather than separate operations for modules 14 and 15.

Another advantage is that the weight of module 35 does not need to be carried around with  
20 carriage 30 when it is not needed. This reduces the weight and inertia of the components supported by carriage 30, thus permitting quicker operation of motor 20 and imposing less load on it. In addition this is achieved without requiring an extra motor for the servicing station. Yet when the less frequent service function is required it can be quickly and easily implemented.

25

Numerous modifications can be made to the above-described embodiments. For example the rotatable hook element 41 may be attached to the carriage 30 with hook element 42 being attached to the module 35.

30 In alternative space-saving arrangements the hook elements are both mounted underneath the module 35 and carriage 30 or are mounted on side surfaces 57, 58, Figure 4. In further modifications, one or both of the hook elements is/are mounted in a respective recess.

Both hook elements may be rotatably mounted on the component which carries them.

Instead of having its own carriage running on a guidance system, the detachable servicing  
5 module may be supported, when not as its base station, by the service station carriage.

Instead of having its own motor 20, the service station carriage can be moved by a gear  
train connected to the main motor of the hardcopy device, i.e. the motor for moving the  
printhead carriage.

10 The connecting arrangement 40 can be constructed by any convenient detachable devices.  
If desired the hooks, or other connectors, may be selectively engaged and disengaged by a  
suitable electrical relay control device. The detachable module 35 may be attached  
magnetically to the service station carriage.

15 Figure 6 shows a carriage 630 of a printhead service station 650 in accordance with a  
second embodiment of the present invention comprising servicing modules 631,632,634  
and 635 corresponding to modules 31,32,34 and 35 of the embodiment of Figure 4.

20 Instead of the connecting arrangement 40, carriage 630 is provided with an electromagnet  
641 which is selectively switched on to attract and hold metallic part 642 of the detachable  
module 635. Module 635 then moves with the carriage 630. After module 635 has been  
aligned with the printheads and has treated the printheads it is returned to its base station  
and electromagnet 641 is switched off so that module 635 again becomes detached.

25 As with connection elements 41,42, the electromagnet 641 and/or the metallic part 642  
may be mounted below or on the side of carriage 630 or module 635 respectively, or in  
recesses.

30 In another modification, the module 35 or 635 is attached to carriage 30 or 630 by a  
relatively weak connection, the effect of which can be selectively overcome by a relatively  
strong connection between the module 35 or 635 and a fixed part of the service station 150  
or 650 to the rear of the module, i.e. on the side of the detachable module remote from the

carriage. Thus in the case of magnetic connectors, for example, a relatively strong electromagnet 648 (shown in broken lines in Figure 6) fixed rearwardly of module 635 may be selectively switched to attract a metallic part 649 to overcome the attraction between module 635 and carriage 630 caused by the relatively weak electromagnet 641.

5

The service station carriage 30,630 can be arranged to be driven linearly in direction 21. Alternatively, the carriage 30,630 may be arranged to rotate about an axis parallel to the scanning axis, so that the scanning modules are arranged circumferentially.

10 Figure 7a shows a carriage 730 of a printhead service station 750 in accordance with a third embodiment of the present invention. Carriage 730 is fixedly attached to a rotatable spindle 760 extending parallel to the scanning axis of the printhead carriage 140. Fixedly attached to spindle 760 are service station modules 731,732 and 734 corresponding to modules 31,32 and 34 of the embodiment of Figure 4. In Figure 7a a pen capping module  
15 731 is located underneath the printheads 141 to 144, only the black ink printhead 144 being visible in Figure 7a.

In Figure 7b, the carriage 730 has rotated to bring a spittoon module 732 underneath the printheads. A further rotation step of carriage 730 would bring a black pen wiping module  
20 734 into the top position.

A detachable connection arrangement 40, such as that shown in Figure 5, is provided between a colour pen wiping module 735 and carriage 730. Hook element 42 is fixed to module 735 and the other hook element 41 is fixed to module 732 which is itself fixed to  
25 the carriage 730.

In Figure 7b, the arrangement 40 has not been connected so that, as the carriage 730 and the other modules move from the disposition shown in Figure 7c to that shown in Figure 7b, the detachable module 735 is left behind.

30

The servicing module which is optionally moved may have an alternative function. For example, Figure 8 shows a fourth embodiment of the present invention in which it is a

polyethyleneglycol (PEG) dispensing module 55 having its own carriage which is selectively attached to a main carriage 60. PEG is a liquid solvent which serves to clean a nozzle by dissolving dried ink which has produced a deposit within the nozzle. In addition PEG serves as a lubricant, in that it reduces the friction between the walls of the air bubbles formed in the ink nozzle and the interior surface of the nozzle itself, and thus removes the air bubbles to permit correct printing.

The embodiment of Figure 8 comprises capping, spittoon and wiping modules 56, 57 and 58 and operates in a similar fashion to the first embodiment. Because the PEG dispensing operation is only seldom used, the time taken to attach and subsequently detach module 55 has a negligible effect on throughput. Instead of PEG, module 55 may dispense another cleaning and/or lubricating liquid such as glycerol.

The fourth embodiment may be modified so that module 55 performs a different relatively rarely-used function, for example scraping, snout wiping, priming or drop detection.

The hardcopy device may have only a single pen, e.g. black, or any number other than four. An exemplary combination is black, yellow, magenta, cyan, light cyan and light magenta. Colours may be duplicated, another exemplary combination being black, black, yellow, magenta and cyan.

The optionally-movable module may be located at the front of the service station instead of at the rear.

In a further modification, a service station may have two optionally-moved servicing modules. For example it may have one at the front and one at the rear. Alternatively, two such modules can be arranged at the rear, say, a first one being selectively attached to the main carriage 30 and the second one being selectively attached to the first one. By combining these modifications, a service station can have three or more optionally-moved modules.

Features and modifications of each of the described embodiments may be exchanged as desired.



**CLAIMS**

1. A hardcopy device comprising one or more printheads mounted on a carriage, said  
5 carriage being arranged to move in a scanning direction along a scanning axis, a  
printhead service station arranged at an end of said printhead scanning axis and  
comprising a movable service station carriage having a plurality of servicing  
modules arranged to undertake servicing operations on the or each printhead, and a  
moving device, said moving device being arranged to move the service station  
10 carriage transversely of said scanning axis, wherein at least one of the servicing  
modules is detachably connected to the other servicing module(s).
2. A device according to claim 1, wherein the moving device is arranged to move said  
15 service station carriage in a straight line extending perpendicularly to said scanning  
axis.
3. A device according to claim 1, wherein the moving device is arranged to rotate said  
service station carriage around an axis extending parallel to said scanning axis.
- 20 4. A device according to any preceding claim, wherein said service station carriage is  
mounted on a guidance system and the or each detachable servicing module is  
mounted on a separate carriage mounted on the same guidance system.
5. A device according to any preceding claim, wherein each detachable connection  
25 comprises a first hook element rotatably connected to the detachable servicing  
module and a second hook element fixedly attached to one of the other servicing  
modules, or vice versa.
6. A device according to any preceding claim wherein the detachable servicing  
30 module is attached by means of a first movement of the service station carriage and  
is detached by a second movement of the service station carriage.

7. A device according to any preceding claim wherein a detachable servicing module serves to wipe colour pens.
- 5 8. A device according to any preceding claim wherein a detachable servicing module serves to apply a cleaning and/or lubricating liquid.
9. A service station for a hardcopy device, said service station being arranged to be mounted on said hardcopy device for relative movement thereto, and said service station comprising a plurality of servicing modules, at least one of the modules  
10 being detachably connected to the other servicing modules.
10. A method of servicing printheads of hardcopy devices comprising moving the printheads in the printhead scanning direction into a servicing position, and, for at least a first servicing operation, moving a service station transversely of the  
15 scanning direction to bring a first servicing module into alignment with the printheads to undertake the first servicing operation, and, for at least a second servicing operation, moving the service station to a position in which it is attached to an optional servicing module and then to a position in which at least the optional servicing module is in alignment with the printheads to undertake the second  
20 servicing operation.
11. A hardcopy device substantially as herein described with reference to Figures 1, 2, 4 and 5, Figures 1, 2 and 6 or Figures 1, 2 and 7 of the accompanying drawings.
- 25 12. A service station for a hardcopy device substantially as herein described with reference to Figures 1, 2, 4 and 5, Figures 1, 2 and 6 or Figures 1, 2 and 7 of the accompanying drawings.
13. A method of servicing printheads of a hardcopy device substantially as herein  
30 described with reference to Figures 1, 2, 4 and 5, Figures 1, 2 and 6 or Figures 1, 2 and 7 of the accompanying drawings.

**ABSTRACT****PRINthead SERVICE STATION**

The printheads of a hardcopy device, such as an ink-jet printer, has a service station 30  
5 which is movable in a direction 21 transversely of a printhead scanning direction 22 and  
comprises servicing modules 31, 32, 34, 35 for undertaking different functions, such as  
capping, spitting, and wiping, one of the modules 35 being detachable from the rest. The  
detachable connection 40 comprises a rotating hook (41, Figure 3) and a fixed hook which  
automatically engage and disengage. As shown the detachable module 35 is for wiping  
10 colour pens and is selectively aligned with a black pen wiping module 34. Alternatively, a  
module (55, Figure 4) may be provided for undertaking a different servicing function such  
as application of a lubricating and/or cleaning liquid.



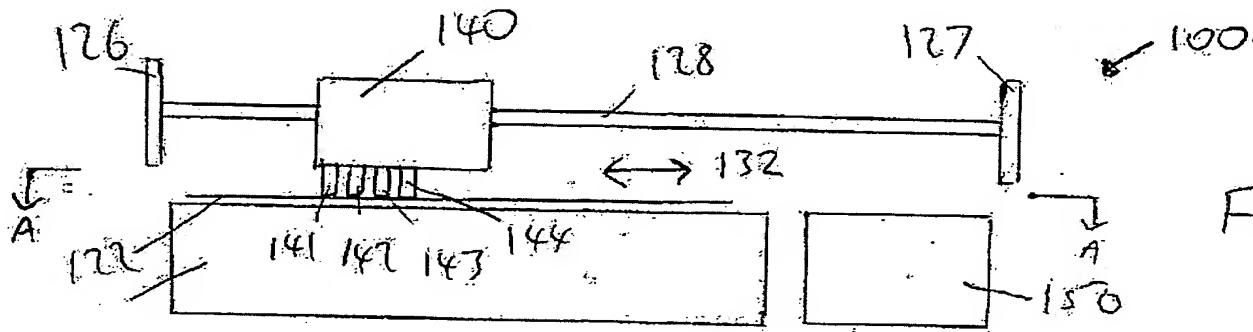


Fig. 1

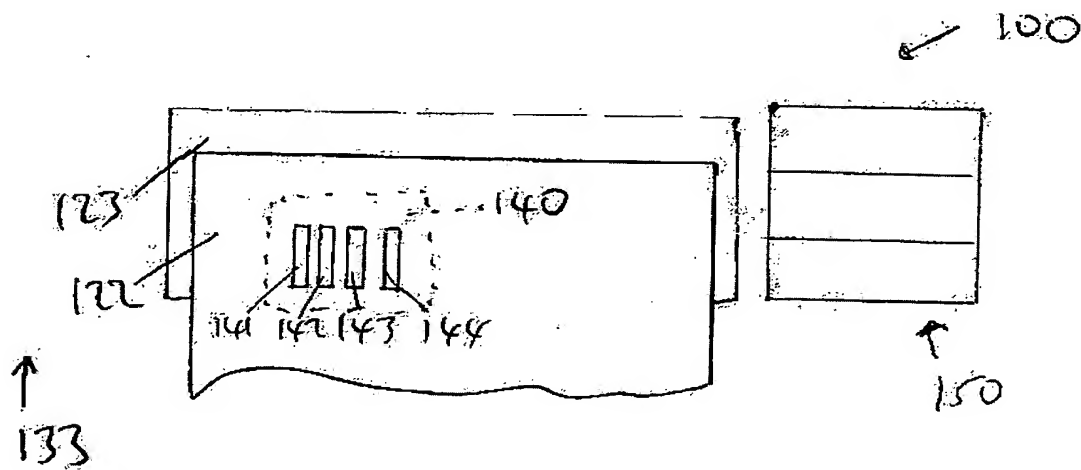


Fig. 2

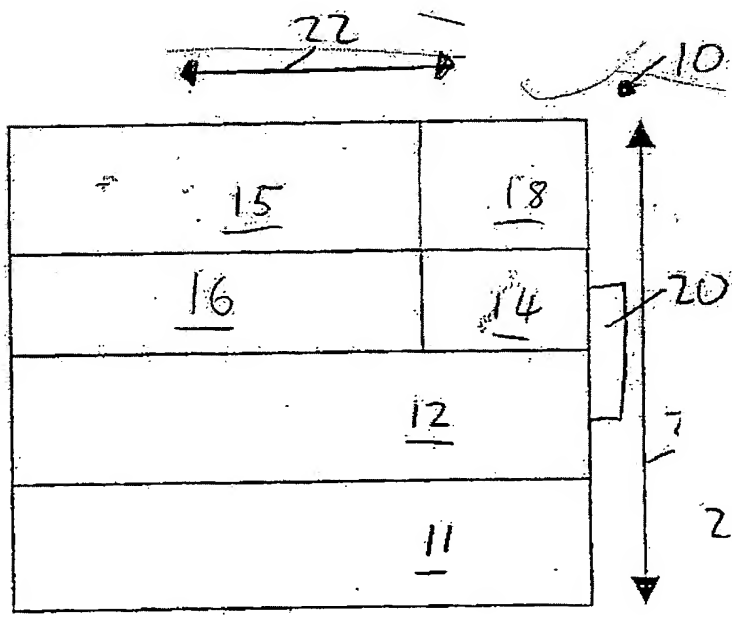


Fig. 3

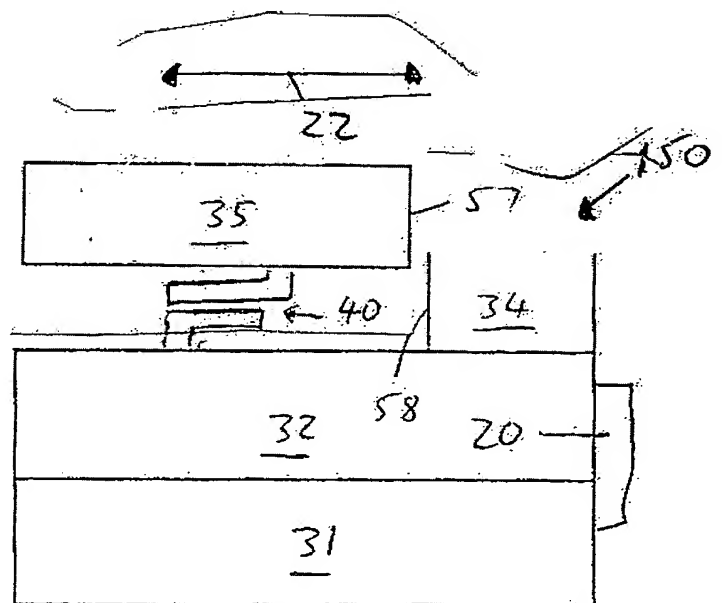


Fig. 4



2/3

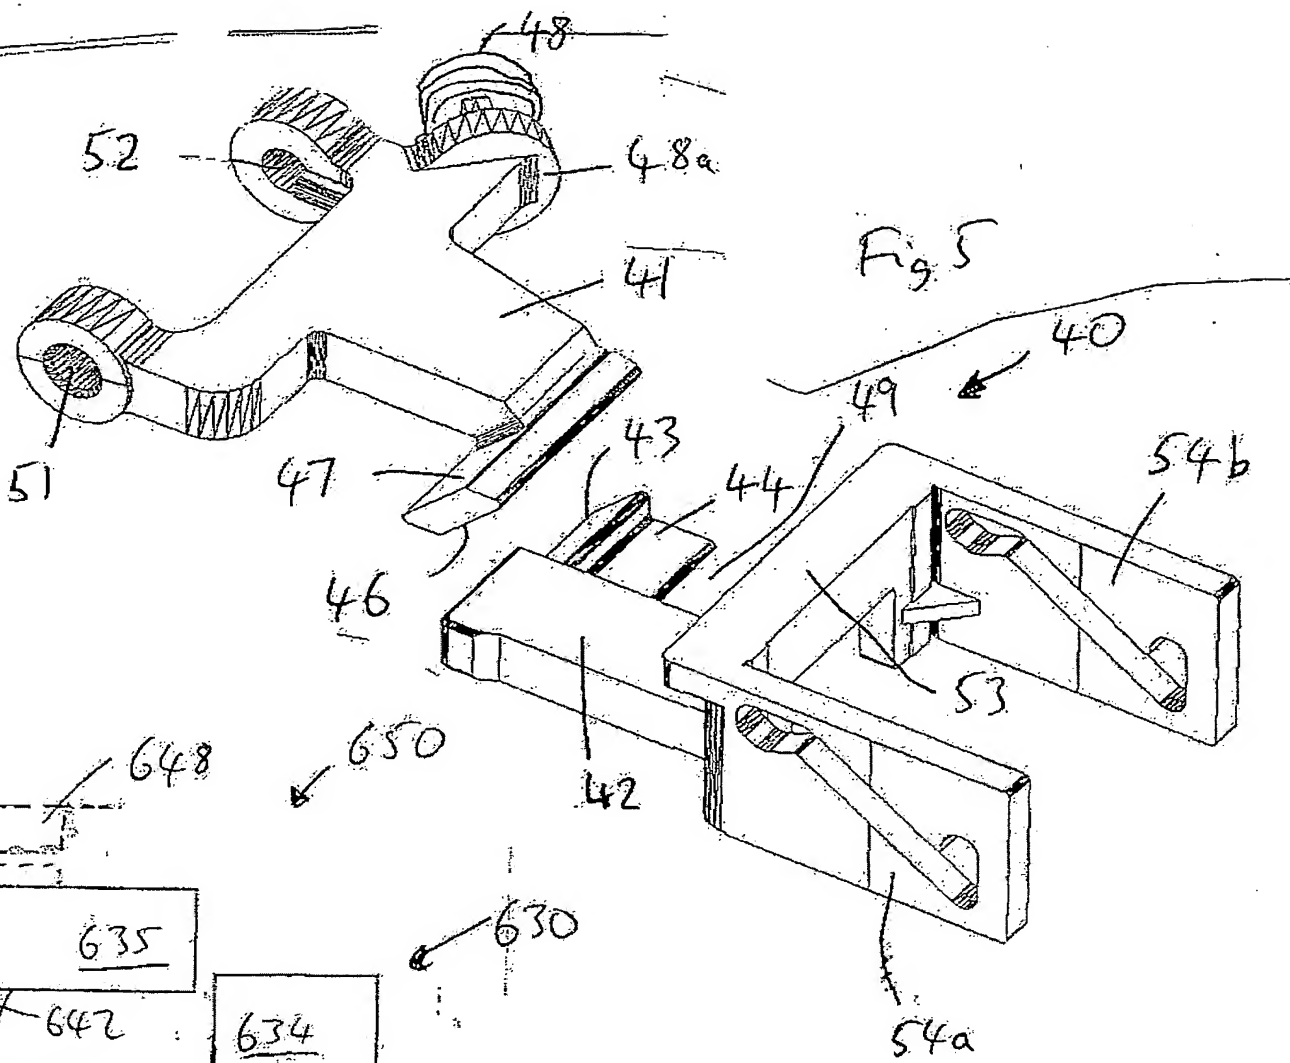


Fig 5

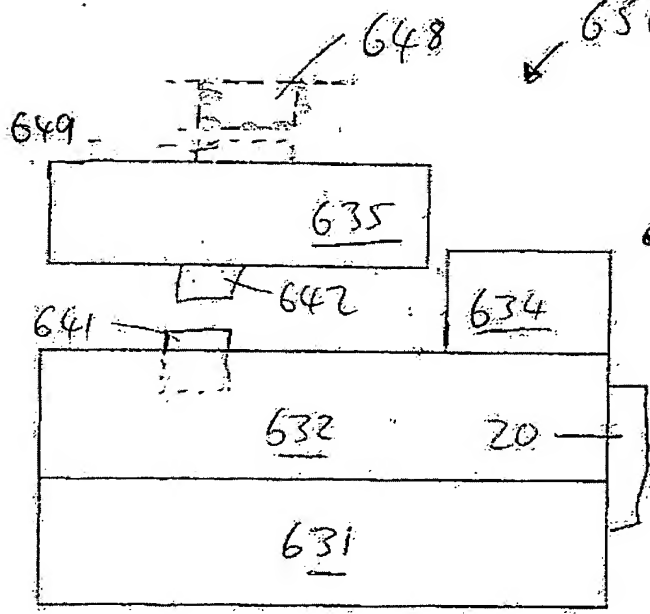


Fig 6




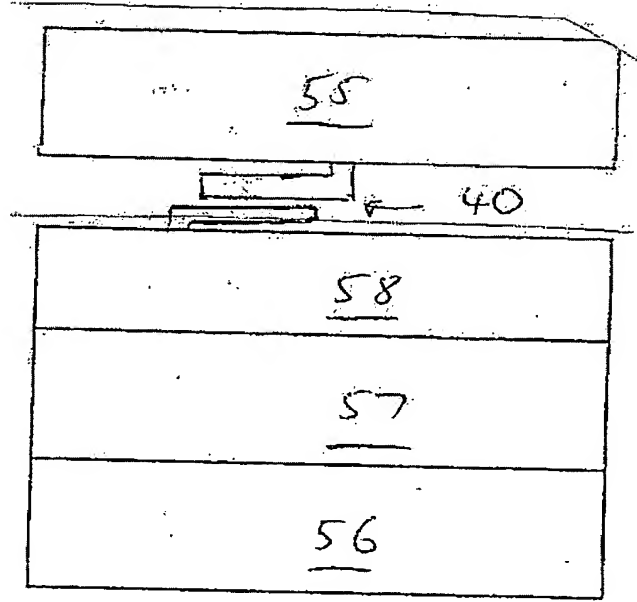


Fig 8

6

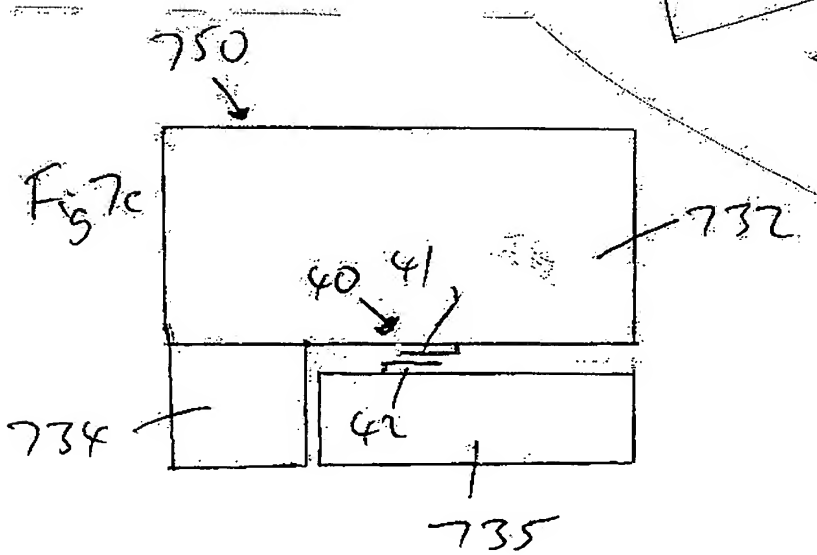

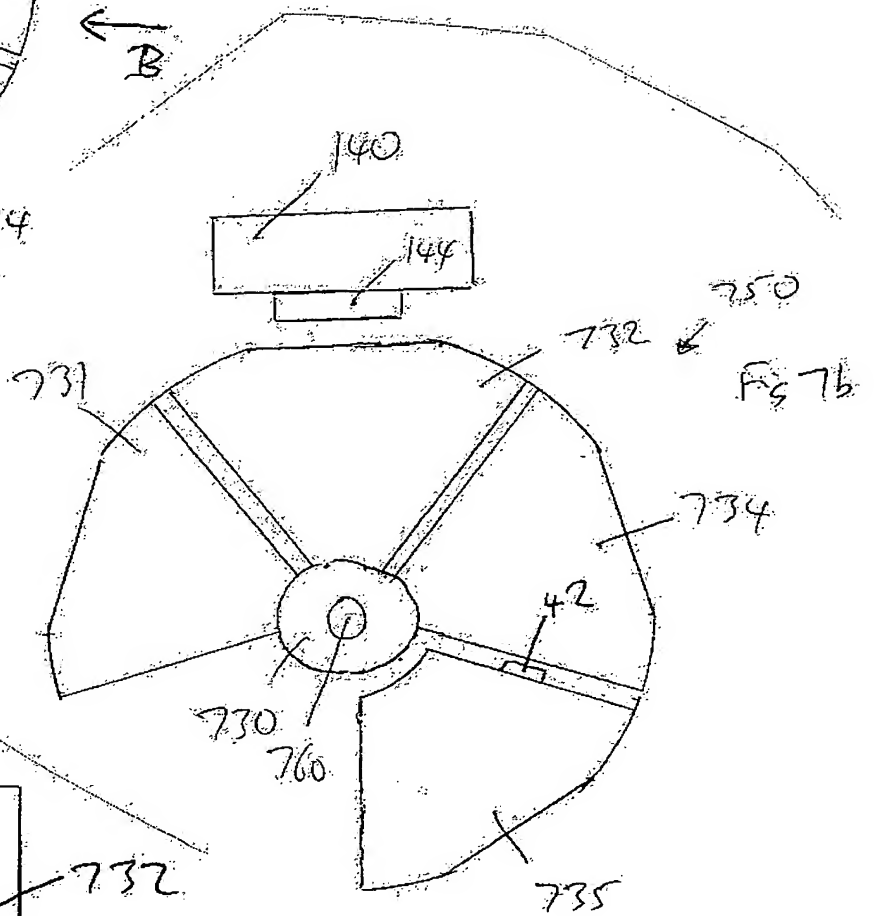

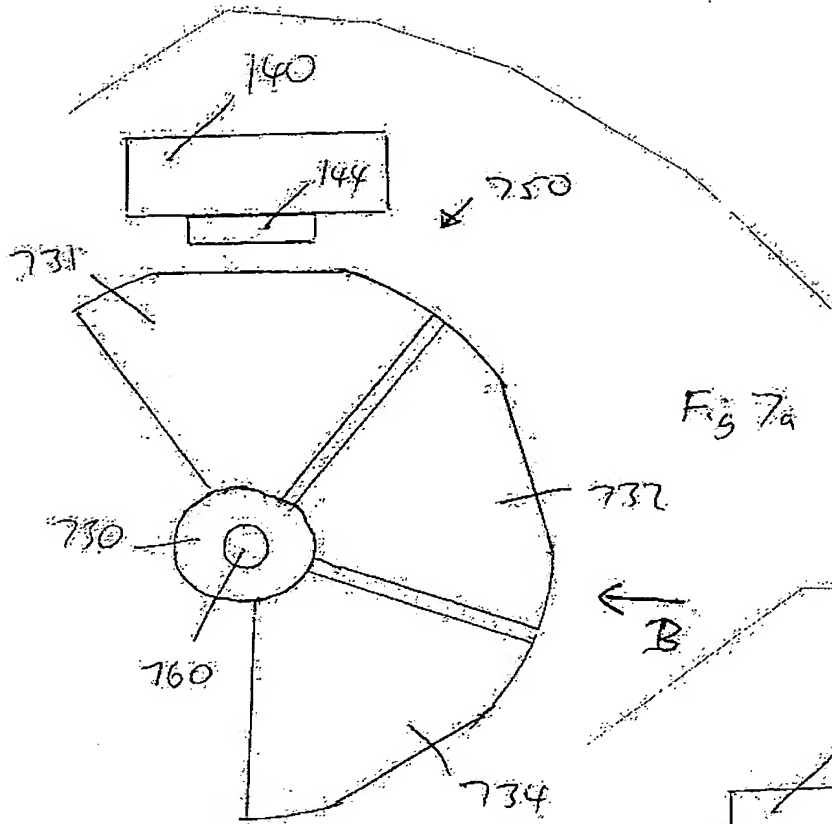

HEWLETT-PACKARD  
COMPANY  
Intellectual Property Administration  
P.O. Box 272400  
Fort Collins, Colorado 80527-2400